



# Cambridge 50 AR, 30 AR & 30

Want it all? Durability, low maintenance, and great looks? Then don't compromise - choose a shingle that can provide the best of all worlds.

Cambridge shingles provide exceptional strength and durability, low maintenance, and dynamic curb appeal. Better yet, they offer immense value, with a choice of either the premium Cambridge 30 AR & 30 shingles or our top of the line Cambridge 50 AR (Algae Resistant) shingles.

Exceptional strength and durability are two exemplary characteristics of IKO Cambridge shingles due to their double layer of extra-heavy fiberglass mat and tough modified sealant. This combination gives these shingles superior tear strength values and great resistance to high winds.

Their great looks are the result of larger, architectural design dimensions and blended shadow bands, which together provide more exposure and definition, thus providing the appearance of a classic wood shake. As a further enhancement to their appearance, Cambridge shingles are available in a unique array of computer-generated color blends.



Shingle color shown on house and swatch is Cambridge Harvard Slate.

### SPECIFICATIONS:

Cambridge 5	50 AR
-------------	-------

Length	<b>40</b> <sup>7</sup> /₃" (1038 mm)
Width	<b>13</b> ³/₄" (349 mm)
Exposure	5 <sup>7</sup> /₃" (149 mm)
Coverage per Bundle	<b>25 sq. ft.</b> (2.32 m <sup>2</sup> )



# Cambridge STRAIGHT CUT 50 AR, 30 AR & 30

- Fiberglass asphalt shingle.
- Laminated architectural design.
- Cambridge 50 AR & 30 AR shingles feature an algae resistant system.
- Class "A" fire resistance rating.
- Limited Wind Warranty coverage up to: 90 mph (145 km/h) for Cambridge 50 AR; if installed with 6 nails and manually sealed, 110mph (177 km/h).
- 70 mph (112 km/h) for Cambridge 30 AR and 30.
- Limited 50 or 30 year warranties.<sup>\*\*</sup>
- 5 year IKO "Iron Clad" protection."

<sup>††</sup> See Limited Warranty for details.

### **Fiberglass standards**\*

- ASTM D3462
- CSA A123.5CSA A123.51

• CSA A123.52

- ASTM D3018 ASTM D3161
- ASTM E108

 $\ensuremath{^*}$  Designed and tested to comply at time of manufacture prior to packaging.

Note: 1.) All IKO fiberglass shingles require an asphalt felt underlayment when applied on slopes less than 8/12. 2.) Class "A" fire resistance rating is achieved only with the installation of felt underlayment. 3.) Cambridge 50 AR & 30 AR shingles feature an algae resistant system.



Shingle color shown on house and swatch is **Cambridge Dual Black.** 


### SPECIFICATIONS:

Cambridge 30 AR	& 30
Length	<b>40</b> <sup>7</sup> /₃" (1038 mm)
Width	<b>13</b> ³/₄" (349 mm)
Exposure	5²/₃" (149 mm)
Coverage per Bundle	<b>33.3 sq. ft.</b> (3.1 m <sup>2</sup> )

			ſ
		E	A
<b>ATIONS:</b> <b>&amp; 30</b> <b>40</b> <sup>7</sup> / <sub>8</sub> <sup>ur</sup> (1038 mm)			
13³/4" (349 mm) 5 <sup>7</sup> /8" (149 mm) 33.3 sq. ft. (3.1 m <sup>2</sup> )			




## Cambridge 50 AR & 30 AR\*

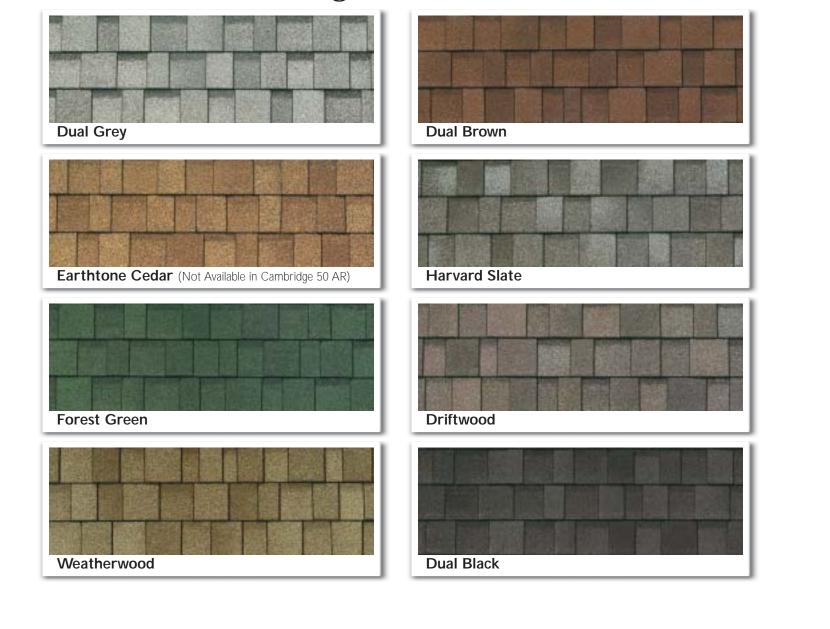







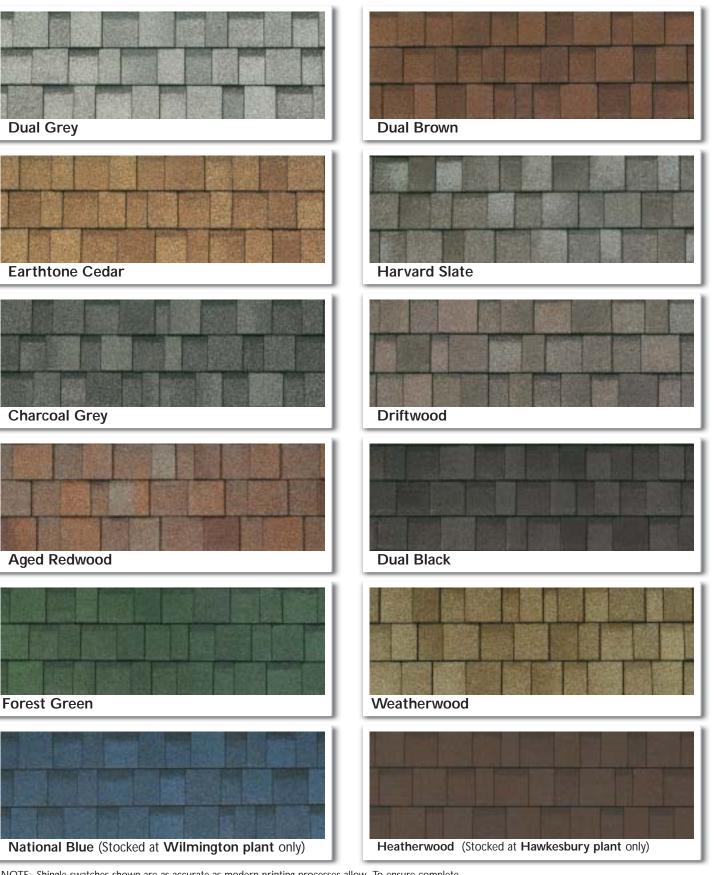



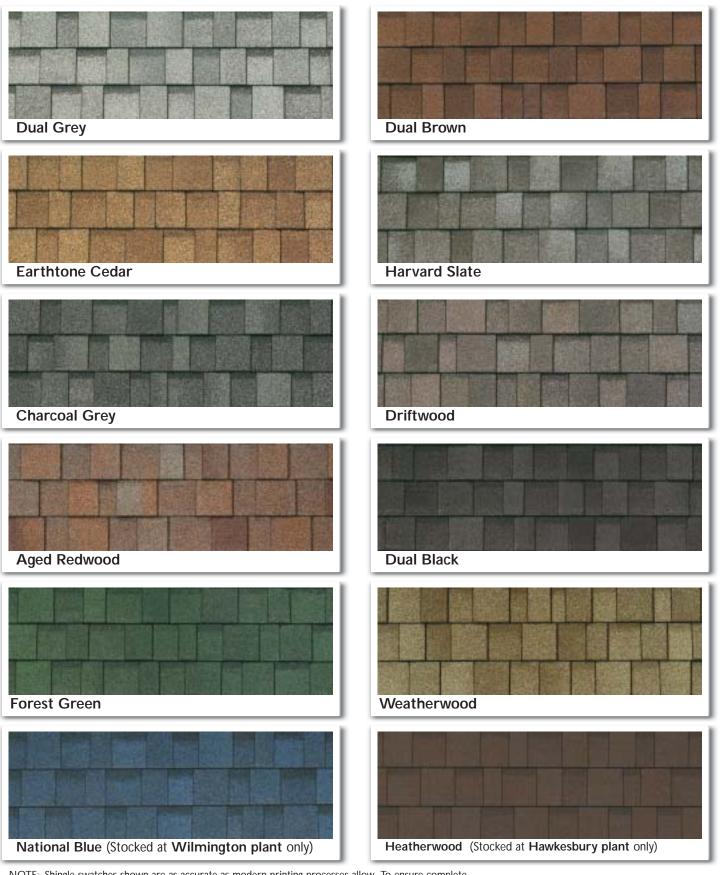

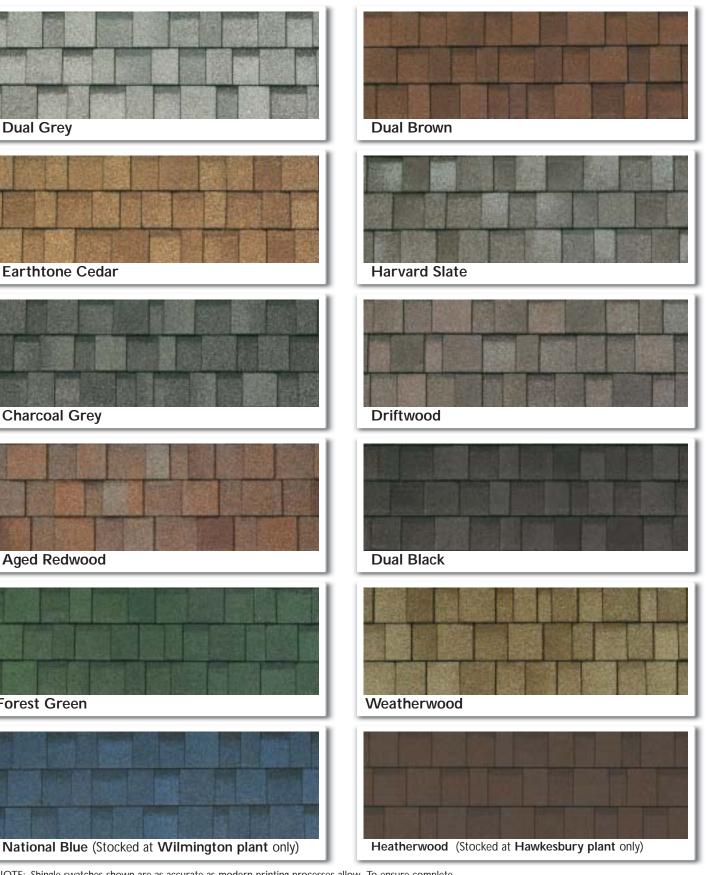

S.

Setting the Standard

NOTE: Shingle swatches shown are as accurate as modern printing processes allow. To ensure complete satisfaction, please make your final color selection from several full size shingles and view a sample of the product installed on a home.

\* Cambridge 30AR stocked at Wilmington & Franklin plants only.

NOTE: Shingle swatches shown are as accurate as modern printing processes allow. To ensure complete satisfaction, please make your final color selection from several full size shingles and view a sample of the product installed on a home.

## Cambridge 30

## GoldShield Premium Ice & Water Protector

## ArmourGard Ice & Water Protector

### "Invisible" protection that helps prevent roof leaks.

- Helps prevent water leakage due to ice dams and wind-driven rain
- Improved flexibility for superior performance
- Slip-resistant surface for safe application
- Tear-resistant membrane
- Self-adhesive for watertight sealing
- Self-sealing around roofing nails
- Meets most building code requirements



Use IKO GoldShield Premium Ice & Water Protector or ArmourGard Ice & Water Protector on these critical roof areas.



### SPECIFICATIONS

GoldShield		
Length		75' (22.86 m)
Width		36" (914 mm)
Roll Contents (approx.)		225 sq. ft. (20.89 m²)
Thickness (approx.)		40 mils. (1 mm)
ArmourGard	1 Square	2 Square
ArmourGard Length	1 Square 33' 4" (10.2 m)	2 Square 65' (19.8 m)
	•	
Length	33' 4" (10.2 m)	65' (19.8 m)



### **IKO Family of Plants**

### **Canadian Plants**

**IKO** Brampton IKO Calgary **IKO** Winnipeg IKO Hawkesbury IKO Madoc Canroof - Toronto Canroof - Brampton IG Machine & Fibers Ltd. IG Ashcroft

### United States Plants

IKO Chicago **IKO** Franklin **IKO** Pacific **IKO** Wilmington **IKO Fiberteg LLC\*** 

### **European Plants**

IKO Ham-Belgium IKO Meple-France IKO A.W.A. - Germany

### **Affiliates of IKO**

ATAB NV-Belgium Nebiprofa BV-Holland Irish Roofing Felts Ltd.-Ireland Ruberoid Building Products Ltd.-UK Permanite-UK

NOTE: Each plant is independently owned and operated.

\*Affiliate of IKO Industries

Find out more about our products now by talking to an IKO sales representative, your professional roofing contractor or contact us directly at: Eastern Canada 1-800-361-5836, Western Canada 1-800-661-1034, United States 1-888-IKO ROOF

or visit our website at:

## www.iko.com

Member of



Note: Shingle swatches shown are as accurate as modern printing processes allow. Shingle chips shown do not fully represent the entire color blend range of the shingles. To ensure complete satisfaction please make your final color selection from several full size shingles and view a sample of the product installed on a home



Note: The information in this literature is subject to change without notice. IKO assumes no responsibility for errors that may appear in this literature